
## **AES-220**

## **AUTO DEALER SOFT TOUCH CAR WASH**

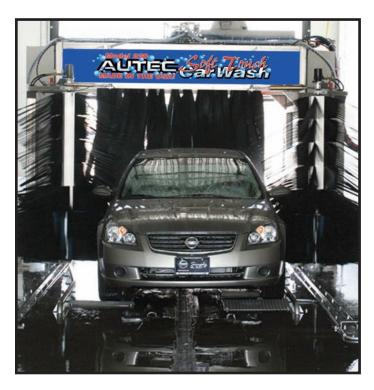

- Compact
- Efficient
- State-of-the-art
- Designed specifically for auto dealers

AUTEC's AES-220 washes thousands of new and pre-owned cars every day, in auto dealer installations all across the country. If you're interested in enhancing customer satisfaction at your dealership, the AES-220 is the system for you.

**SPECIFICATIONS** 

MODEL AES-220

ELECTRICITY 208/230V 3PH, 4 WIRE 40 AMP 10 HP

AIR PRESSURE 100 PSI

AIR SUPPLY
5 CFM

RECOMMENDED
BAY SIZE
32' LENGTH
16' WIDTH

MAXIMUM
CAR SIZE
110" WIDTH
84" HEIGHT

Unprecedented wash quality; profitable, trouble-free operation; and long-term efficiency and durability are attributes of **all** AUTEC systems. We ensure these high performance levels by utilizing carefully monitored production controls and by the use of superior quality components: Soft cloth or polyflex for safe, thorough cleaning; simple, yet durable, hydraulic operation for the most gentle vehicle surface massage; reliable, self-diagnostic, software-driven controls; all stainless-steel construction, for optimum structural integrity, and dependable, wet-environment operation.



2500 West Front Street • Statesville NC 28677 • 704-871-9141 • fax 704-871-9101 www.autec-carwash.com • info@autec-carwash.com

Features:	Benefits:
Water-based Hydraulic Operation	Specially designed water-based hydraulic fluid makes the machine environmentally friendly in all circumstances.
Stainless Steel	Absolutely the most durable construction for dependable, long-term operation in harsh car wash environments.
All Welded Frame	Welded, not bolted, for superior structural integrity, ensuring enhanced machine longevity & performance.
Dual Arm Support	Keeps arm rotation true and consistent on all four arms.
Hydraulic Operation	Variable speed hydraulic drive for smooth operation provides control of the torque and speed of each arm for effective cleaning without damage.
Direct Drive	No chains, gear boxes or belts to require maintenance.
Soft Cloth or Polyflex Friction	Double front and rear side arms, plus our dual cloth mitter ensures that every area of a vehicle's surface is gently massaged clean with the use of soft cloth (standard) or polyflex (optional) strips lubricated with just the right volume of soap and water. Years of research and testing have determined the best sizes, lengths, cuts, cores and hardware to ensure unprecedented cleaning performance.
Split Hub Design	The lower section is wide to contour to the curved vehicle undersides. The top is slim to accommodate the tops of vans and trucks with large mirrors. We call this our "mirror-saving" hub design – ensuring safe, thorough cleaning.
Overhead Mitter	The double action, overhead mitter effectively cleans all flat surfaces without the dangers and damages once associated with top brushes.
Mitter Retract	Accommodates full or partial retract option for vehicle safety during entry and exit.
Self-Diagnostic Computer	Self-diagnostic software monitors car wash functions.
On-board Chemicals & On-board Drive- through Rinse Arch	Eliminates the need for a separate equipment/utility room. Allows for faster, more economical installation. Operates in only 30' of bay length, although 32' is recommended.
Hydraulic Tank Heater	Keeps hydraulic oil warm to ensure consistently smooth equipment start up.

## www.autec-carwash.com 1-800-438-3028